
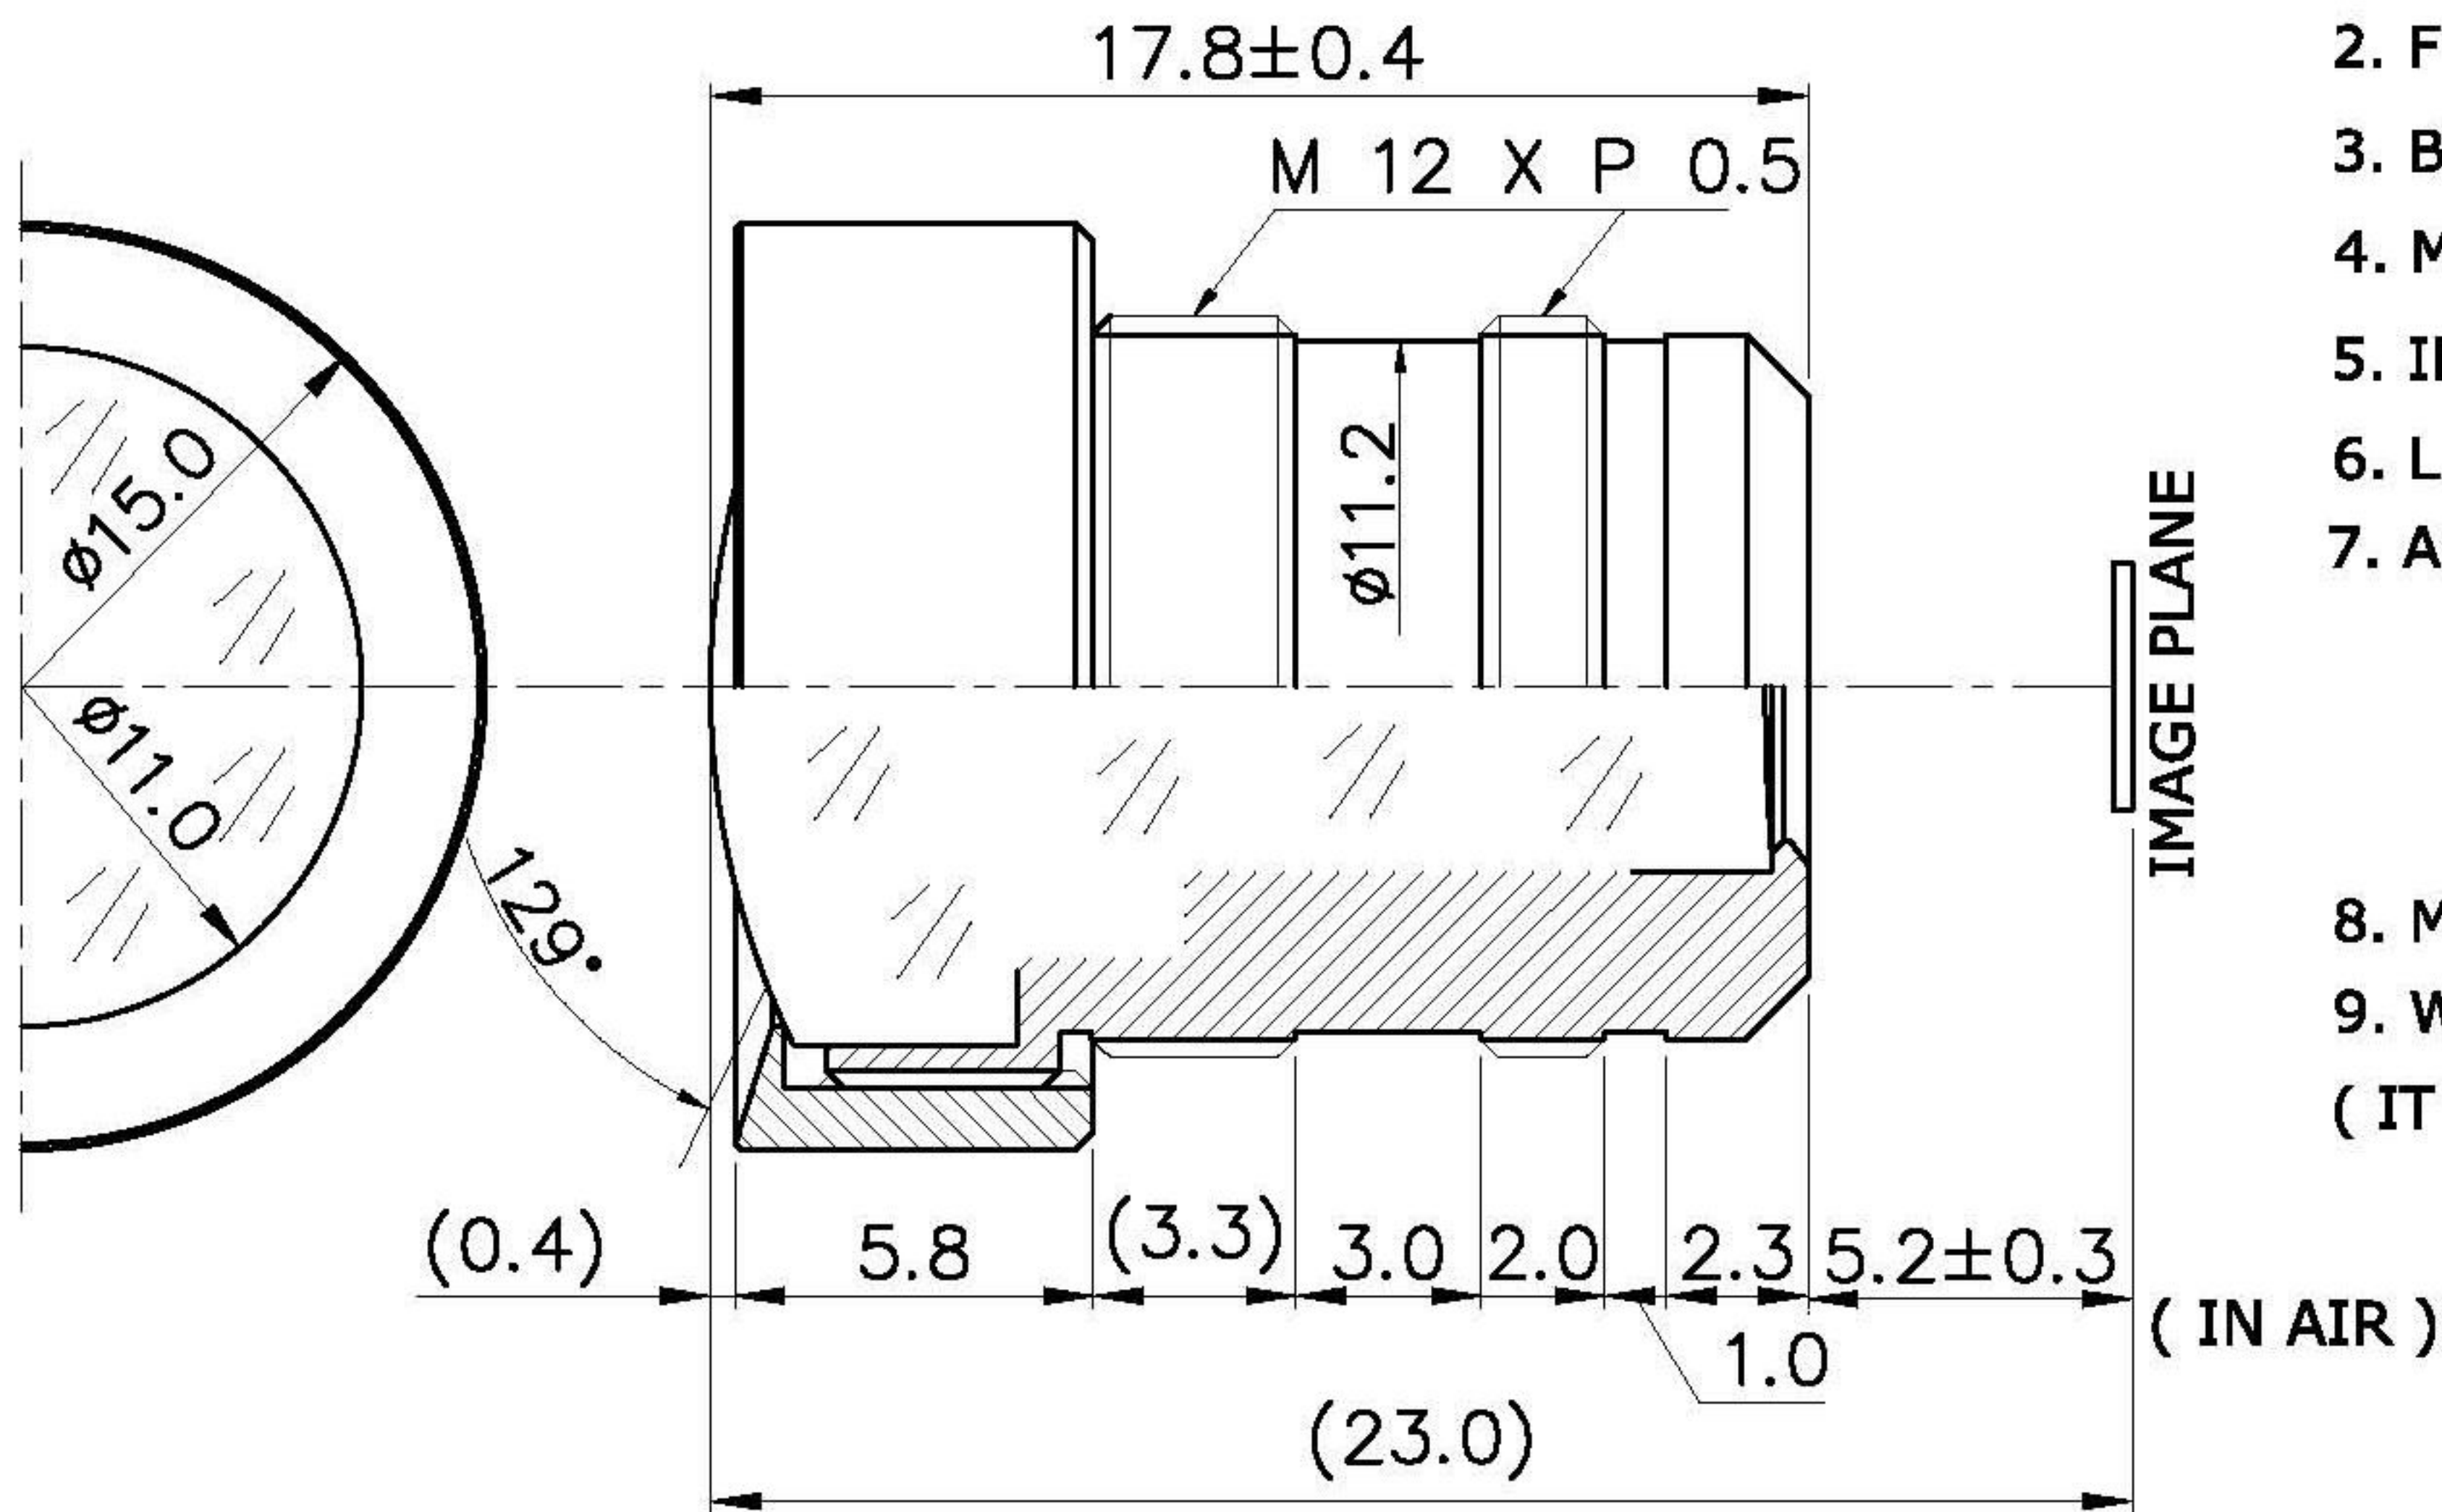


2.9 MM (K TYPE)



1. SENSING AREA : 1/3" & (1/4")
2. FOCAL LENGTH : 2.9MM ±5%
3. BACK FOCAL LENGTH : 5.9MM ±5% (IN AIR)
4. MAXIMUM RELATIVE APERTURE : 2.5 ±5%
5. IRIS : WITHOUT DIAPHRAGM
6. LENS CONSTRUCTION : 6 COMPONENTS 6 ELEMENTS
7. ANGULAR FIELD OF VIEW : 1/3" & (1/4")
- | | | |
|------------|----------|-------|
| DIAGONAL | 129.0° & | 88.4° |
| HORIZONTAL | 94.2° & | 71.7° |
| VERTICAL | 69.9° & | 53.1° |
8. MINIMUM OBJECT DISTANCE : 40 CM - 00
9. WEIGHT : 6.1 gr
- (IT IS CHANGEABLE ON EXTERNAL DIMENSION
BY CUSTOMER'S REQUIREMENT.)

						NO.	00005
NO.	DESCRIPTION			MATERIAL	SIZE	Q'TY	REMARK
DRAWN			TOLERANCES				
CHECKED			ANGLE 1.2°	TITLE FOR B/W & COLOR f=2.9MM Fno 2.5			
APPROVED			x. ± 0.2				
SCALE	4/1		.x ± 0.1 .xx ± 0.05				
Johnmarc Industrial Corp.				DRAW NO. 250118		SHEET NO.	