


16.0 MM (K TYPE)

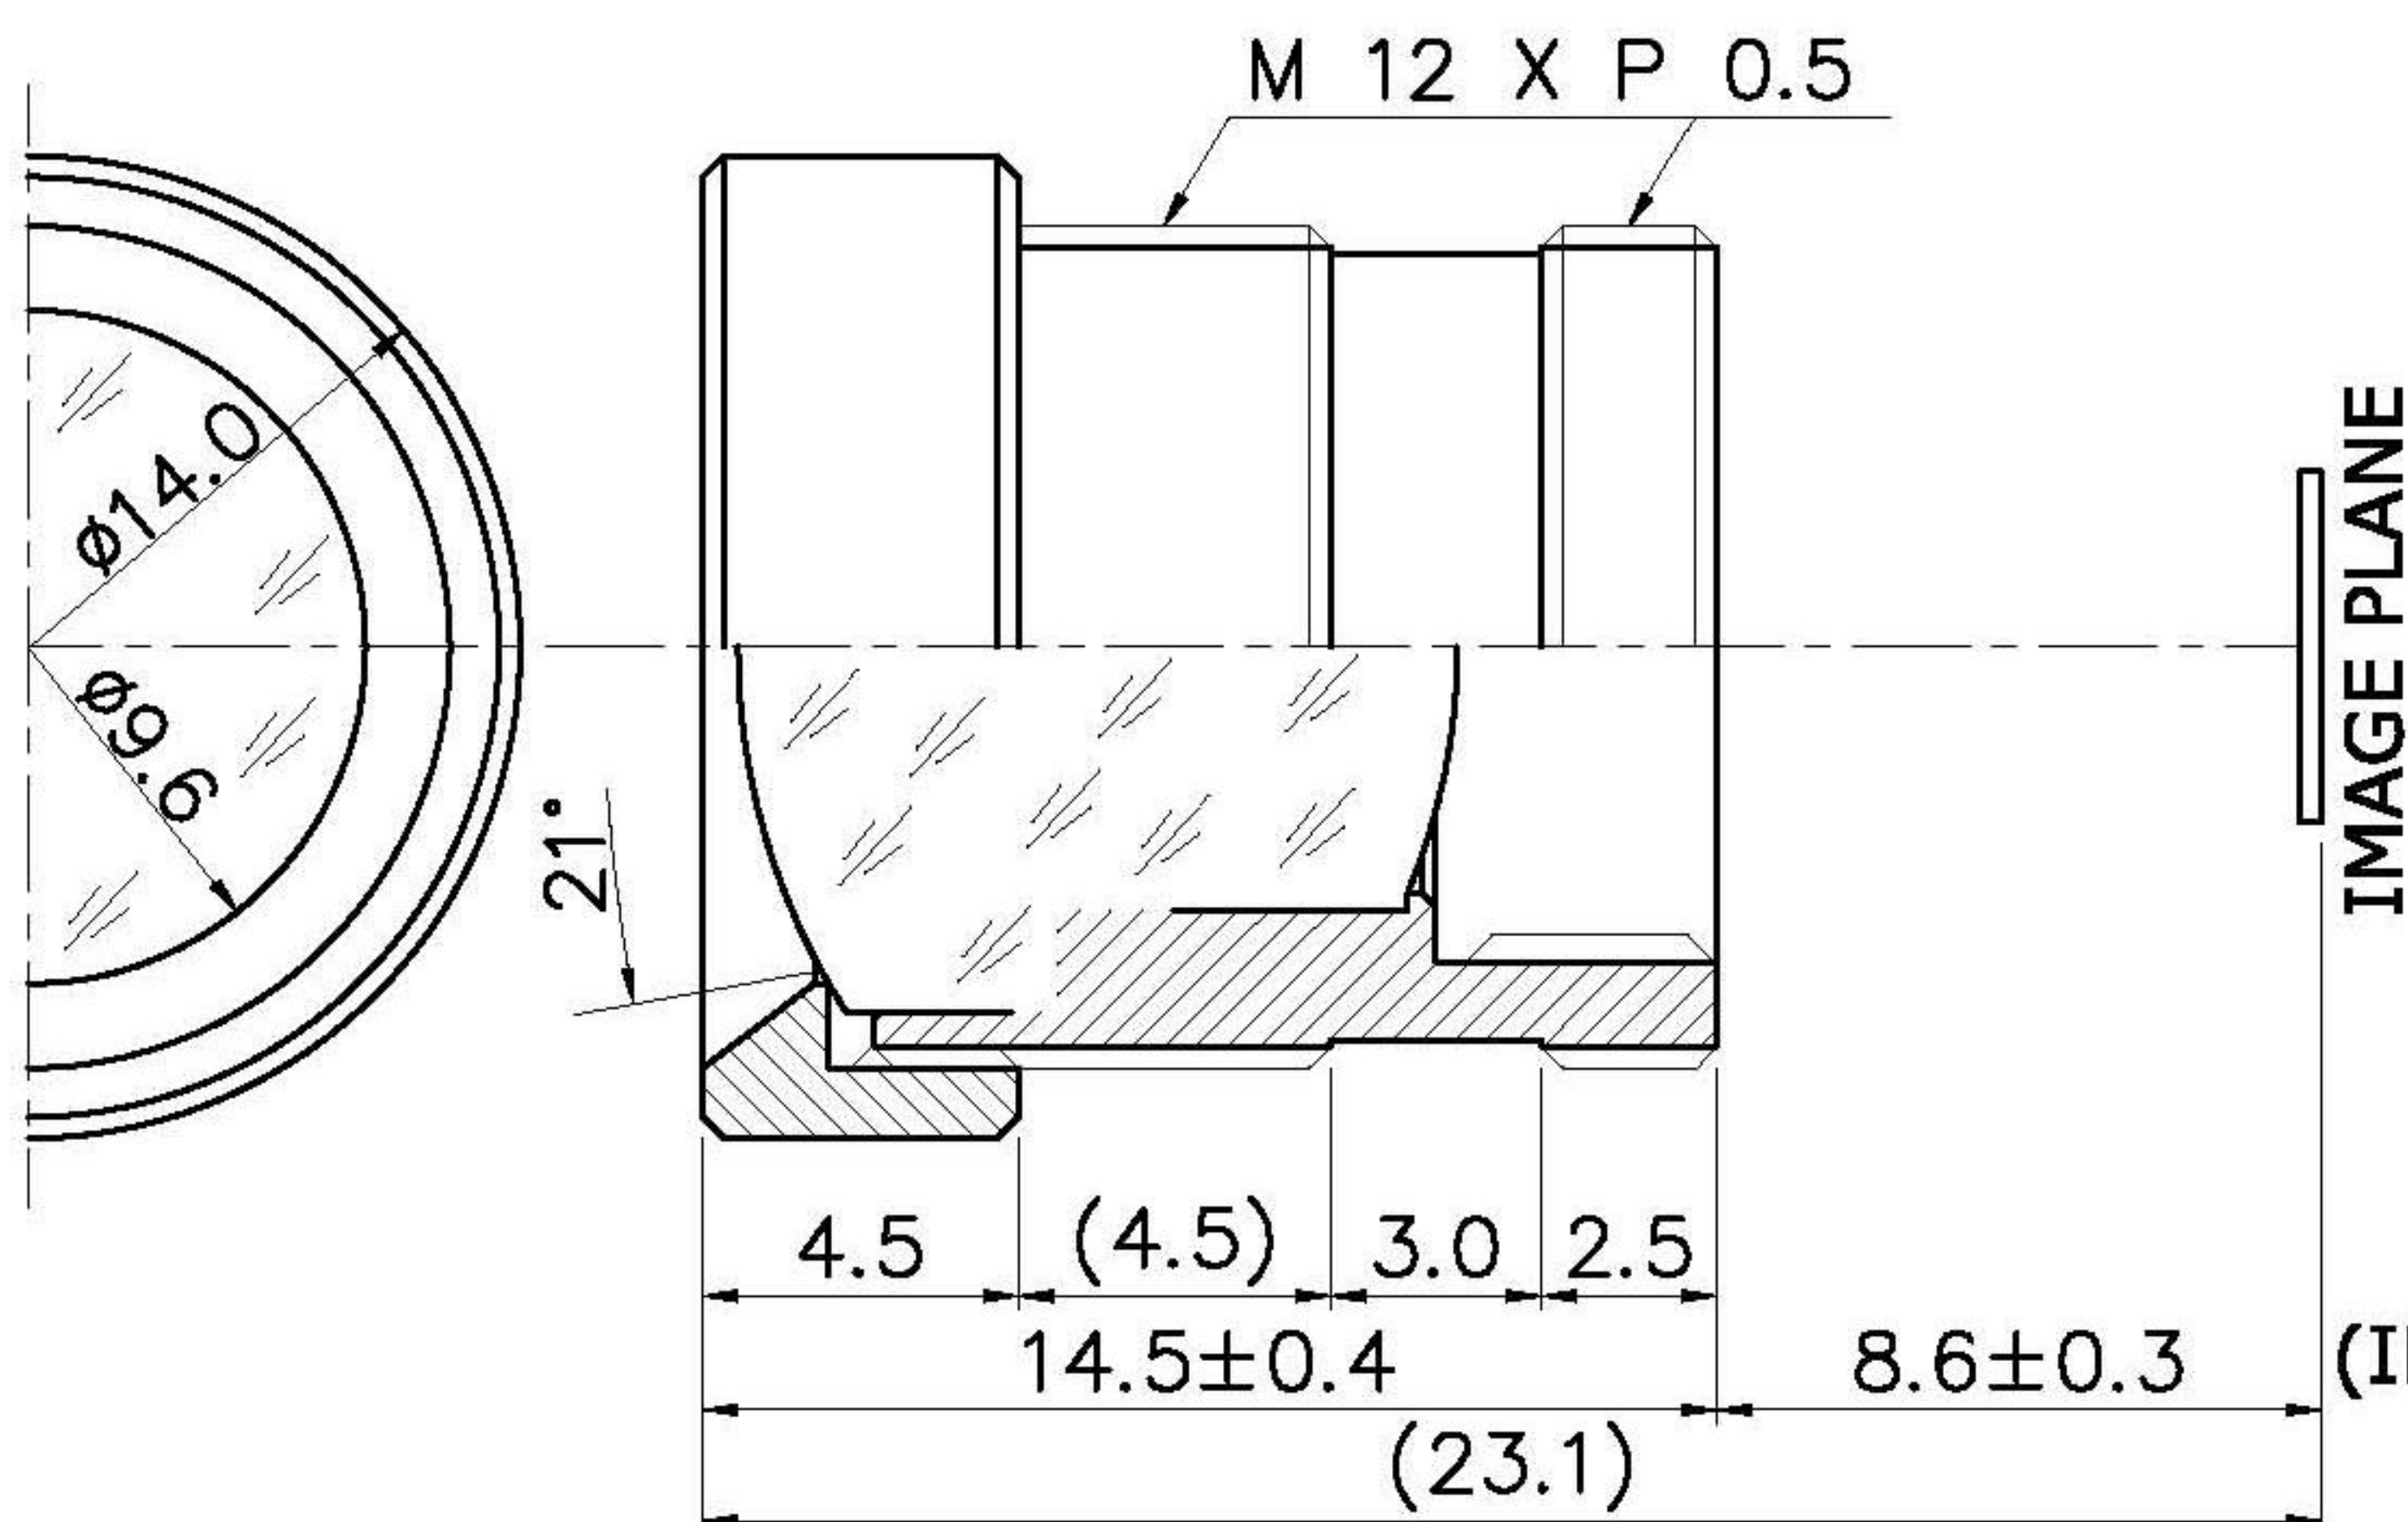

1. SENSING AREA : 1/3" & (1/4")
 2. FOCAL LENGTH : 16.0MM ± 5%
 3. BACK FOCAL LENGTH : 12.3MM ± 5% (IN AIR)
 4. MAXIMUM RELATIVE APERTURE : 2.0± 5%
 5. IRIS : FIXED
 6. LENS CONSTRUCTION : 3COMPONENTS 3ELEMENTS
 7. ANGULAR FIELD OF VIEW :

	1/3" &	(1/4")
DIAGONAL	21.0° &	15.8°
HORIZONTAL	16.6° &	12.4°
VERTICAL	12.4° &	9.3°
 8. MINIMUM OBJECT DISTANCE : 80CM -00
 9. WEIGHT : 4.2gr
- (IT IS CHANGEABLE ON EXTERNAL DIMENSION BY
BY CUSTOMER'S REQUIREMENT.)

				NO.	00000
NO.	DESCRIPTION		MATERIAL	SIZE	Q'TY
DRAWN		TOLERANCES			
CHECKED		ANGLE 1.2°	TITLE FOR B/W & COLOR f=16.0MM Fno 2.0		
APPROVED		x. ± 0.2			
		.x ± 0.1			
SCALE	4/1	.xx ± 0.05			
Johnmarc Industrial Corp.			DRAW NO. 250118	SHEET NO.	

